



Ø 27/36 / 39,6 Clip für Direkt- und Leiterplattenmontage
Clip for Direct- and PCB-mounting


61 004 01.3

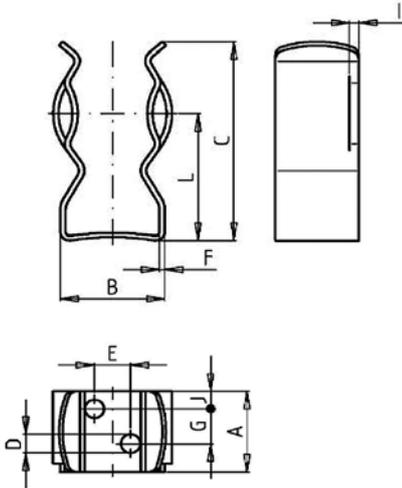


91 094 01.3

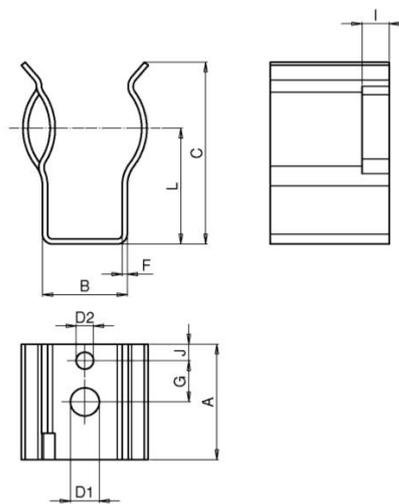


91 100 01.3

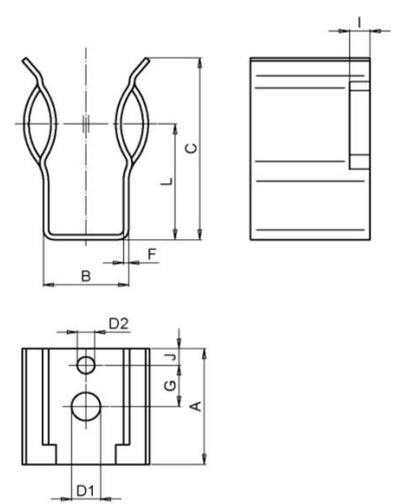

63 002 01



91 094 01.4



Verpackungseinheit / Packing unit:	100 Stück / 100 pieces	100 Stück / 100 pieces	100 Stück / 100 pieces	100 Stück / 100 pieces
IEC 60269-2	Anschraubclip Fuse-Clip Screw Mountable 61 004 01.3	Anschraubplatte Clamping Plate 63 002 01	Anschraubclip Fuse-Clip Screw Mountable 91 094 01.3 / 91 100 01.3	Anschraub-/Kontaktplatte Clamping-/Contact-Plate 91 094 01.4
IEC 60269-3	27 x 60 mm / 27 x 140 mm / 36 x 127 mm / 36 x 190 mm / 36 x 250 mm			
IEC 60269-4	Bemessungsleistungsaufnahme 6 W / Rated Power Acceptance 6 W			
	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated	Kupferlegierung CuSn, vernickelt / Copper alloy CuSn, nickel-plated
A	18,5 mm	18,5 mm	35,0 mm	63,0 mm
B	23,2 mm	15,0 mm	25,0 mm	20,0 mm
C	45,5 mm	3,0 mm	55,0 mm	6,0 mm
D	4,3 mm	M4	-	-
D1	-	-	8,5 mm	8,5 mm
D2	-	-	5,1 mm	5,1 mm
E	8,0 mm	8,0 mm	-	-
F	1,2 mm	-	1,5 mm	-
G	8,0 mm	8,0 mm	12,5 mm	-
G1	-	-	-	12,5 mm
G2	-	-	-	34,5 mm
I	2,0 mm	-	8,0 mm	-
J	4,0 mm	4,0 mm	5,0 mm	17,5 mm
L	29,0 mm	-	35,0 mm	-
Gewicht/Weight kg/1	0,018	0,010	0,018	0,133